

electrical accessories



Double sockets

For joining two 4-mm plugs; only for use with low voltages

- DG500-4S Double socket, insulated, black**
- DG500-4R Double socket, insulated, red**

Cable connectors

For joining screw posts with 4-mm plugs; only for use with low voltages

- DG500-2S Cable connector, insulated, black**
- DG500-2R Cable connector, insulated, red**

DG500-4A BNC to 4-mm socket adapter

For connecting a 4-mm plug to a BNC socket

DG500-3D Double pin plug

For joining two 4-mm sockets

Sockets


4-mm sockets with soldering contact

- DG500-6R Device socket, insulated, red**
- DG500-6S Device socket, insulated, black**
- DG500-8R Plug socket, insulated, red**
- DG500-8S Plug socket, insulated, black**

Crocodile clips

Can be connected to 4-mm plugs

- DG500-3R Crocodile clip, insulated, red**
- DG500-3S Crocodile clip, insulated, black**
- P3310-1A Crocodile clip, plain metal**
- P3911-3D Crocodile clip, plain metal, with 4-mm plug**

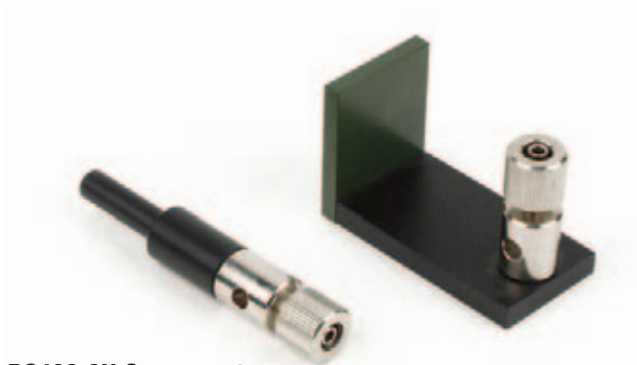

DS406-2N Screw post

For insulated mounting of wires and rods up to 6 mm in diameter; plastic insulating capsule (D=18 mm) on a plastic support (D=10 mm); with a nickel-plated brass screw (including a 6-mm through hole) and a screw-on bushing of nickel-plated brass with a threaded pin accepting a 4-mm safety plug
Total length: approx. 125 mm

DE453-2V Screw post, magnetic

For insulated mounting of wires and rods of up to 6 mm in diameter magnetically on steel panels; a nickel-plated brass screw (including a 6-mm through hole) and a screw-on bushing of nickel-plated brass with a threaded pin accepting a 4-mm safety plug, permanently mounted on a plastic I-bracket; I-bracket is fitted with four strong neodymium magnets
Length: 78 mm



DE454-2P Bearing bridge

Bridge and distributor, made of acrylic, with three pairs of 4-mm sockets; one hole and clamping screw for fastening it to a support rod 10 mm in diameter; bearing cups at the ends of the bridge allow it to be mounted to rotate on fork with pivots DS406-1G.
Dimensions: 92x20x20 mm

DE320-1E Plug pin clamp

Quick-acting spring plug insulated by hard plastic; 4-mm banana plug with a transverse and an axial bushing for fastening pins and wires up to 4 mm in diameter; for low-voltage use only

P3711-4K Clamping socket with plug

Clamping socket with a threaded pin for accepting 4-mm safety plugs; may be screwed onto a screw mounted on a 4-mm plug; 4-mm through hole; nickel-plated brass; D=12 mm
Total length without plug: 48 mm

P3711-4H Sleeve on plug

Metal sleeve accepting 4-mm plugs or safety plugs; length without plug: 30 mm